

Mr.SLIM

Range of Split Air Conditioner





Comfortable ME



Mitsubishi Electric's unwavering commitment to research and development is helping us create the next generation of groundbreaking technologies. Through our research centers around the world, we're taking on the challenges of technology to contribute to a better society in the future.


Ozone depletion Composition Stability NEW REFRIGERANT Non-uniform boiling point composite refrigerant (HFC:R32/R125=50:50WT%) NON **GOOD** R410A 0 CURRENT REFRIGERANT Single component refrigerant (HCFC:R22=100WT%) R22 0.05 NON GOOD * Relative value when CFC is considered as 1

Many scientist believe that refrigerants that contain hydrochlorofluorocarbons such as HCFC-R22 with chlorine are a contributing factor to this problem. R410A - a chlorine-free, non-inflammable, environmentally friendly and energy efficient refrigerant offers a new alternative, in addition to the properties just mentioned, R410A is a easy to handle as the environmentally unfriendly R22 because of its pseudoazeotropic characteristics.

R410A is also highly efficient and provides the same level of performance as R22

Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum - ceramic particales that work to kill bacteria and deodourise the circulating air. Better dust collection than conventional filters is at is okay to wash the filter also ensured.



*Available in MS-GK Series


SAVE



Econo Cool - smart save

The Econo Cool one touch operation automatically adjusts the direction of airflow based on the temperature at the air outlet. The set temperature can therefore be 2°C above conventional temperature settings without loss of comfort and with a 20% increase in energy efficiency.

Ensures greater comfort even when the temperature setting is 2 °C above conventional settings.

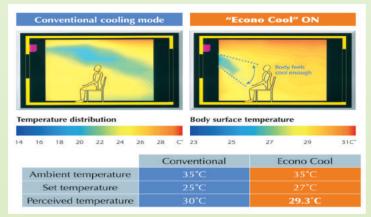



The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.



Wide & Long Airflow

Bringing extra comfort to your life, left-right vane can be automatically controlled by remote controller. Simply use of Wide vane mode, you can easily adjust direction of airflow to reach any corner of the room. The high-power motor combines with a newly designed "long mode" to push air out further, providing an extended airflow that can reach the far end of long living rooms or each the kitchen in open-concept living areas and studios. When operating in Long mode, the airflow can be extended as far as 12m.



By combining the use of Wide-vand mode and Long and vane mode, you can adjust airflow horizontal 7 directions and vertical 6 directions. Exclusive to Mitsubishi Flectric, this advantage ensures maximum control over air direction and flow up to 42 ways, which guarantee that the air conditioning effect isn't wasted, where it isn't needed.



LCD Remote Control

From temperature and operation mode to air volume and direction, you'll be able to customize your environment at a touch of a button. Large, easy-to-identify buttons allow for easy access to frequently used functions. The generous LCD display lets you check temperature and other operating conditions at a glance, while an easy open slide cover prevents inadvertent operation of preset controls and other functions.

Auto Mode: We offer you an easy way to comfort with auto mode. "Auto Vane" is created to set the vane angle automatically. These could let ideal temperature to be achieved in the shortest amount of time.

Mode Change: Change to "I FEEL"-"COOL"-"FAN"-"DRY" Area Settings: Efficient cooling is realized for the target space.



Fuzzy Logic "I Feel"

In the room too hot or cold, too dry or humid? On auto mode selection, the fuzzy logic control system adjusts conditions to suit you. Your selected temperature setting is stored in the memory system and reproduced automatically each time you operate your air conditioning.



Electronic Metal Housing Box

This special box protects the electronic circuitry from dust ensuring its reliable operation and preventing fire in the event of a short circuit.





to increase the heat exchange area





All outdoor cabinets have been treated with special anti-rust painting.





Powerful Cool

The automatic, one-touch Powerful Cool system ensures faster cooling. It produces 10% more airflow than the "high fan" speed, cooling the room in less than 15 minutes, then automatically returning to the regular setting.



Computerized dehumidification

Eliminate dampness without lowering the temperature for healthier, more comfortable air-conditioning, while enjoying great year-round economy.



24 Hour Timer

On/Off operation can be set simultaneously in 10-minute increment for a 24hour period.



12 Hour On and Off Timer



Auto Restart

This function permits automatic return to previous operation conditions after a sudden power black-out. You can now sleep peacefully all through the night without having to get up and turn your air-conditioner back on.



Self-diagnostic function

In the unlikely event of a malfunction, the LED on the indoor unit flashes to indicate the exact spor to be checked.



Auto Vertical Vane

The air outlet vane swings left and right so that the airflow is spread quickly I n the room.

Available in MS-GK18/24



Auto Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room



DC Fan Motor

A highly efficient DC motor drives the fan of the indoor unit. Efficiency is much higher than an equivalent AC motor.

MS-GK Series









MS-GK10/13/VA

LCD Remote Controller






MS-GK18/24/VA

LCD Remote Controller



GK SERIES SPECIFICATIONS

		Max.Height Out-In m 10 10	Max.Length Out-In m 20 20	Ext.Piping Diameter Liquid/Gas mm 6.35 / 9.52 6.35 / 12.7 6.35	Breaker Size (MCB required) A 10 10	Weight kg 24.5 33.5	Outdoor Unit Dimensions H*W*D mm 525 x 718 x 255 550		Indoor Unit Dimensions H*W*D mm 290 x 799 x 232	Operating Current A 3.3 4.5	Air VolumeIndoor UnitCFM448477	Sound Level (SPL) Indoor Unit (Lo/Mid/Hi/Shi) dB(A) 26/32/38/44 29/36/42/46 35	EER 3.65 3.60	Total In put Rated kW 0.740 1.000	TR TR 0.75 1.0	Capacity Rated KW 2.7 3.6	Function Cooling Only	Supply Outdoor(V/Phase/Hz) 230V/SinglePhase/50Hz	Power Source Outdoor Power supply	Outdoor Unit MU-GK10VA MU-GK13VA MI	Indoor Unit MS-GK10VA MS-GK13VA MS
A COUNTY OF THE PARTY OF THE PA	R410A	10	20	6.35 / 12.7	10	33.5	8 x 255	10	9 x 232	4.5	477	29/36/42/46	3.60	1.000	1.0	3.6	Cooling (230V/SinglePh	Outdoor Powe	MU-GK13VA	MS-GK13VA
The state of the s	R410A	10	30	6.35 / 15.88	15	40	550 x 800 x 285	16	325 x 1100 x 238	6.4	777	35/41/47/53	3.59	1.450	1.5	5.2	Only	hase/50Hz	ver supply	MU-GK18VA	MS-GK18VA
Tomas and the second se	R410A	10	30	6.35 / 15.88	20	63	880 x 840 x 330) x 238	8.2	777	37/42/47/53	3.57	1.850	1.9	6.6				MU-GK24VA	MS-GK24VA

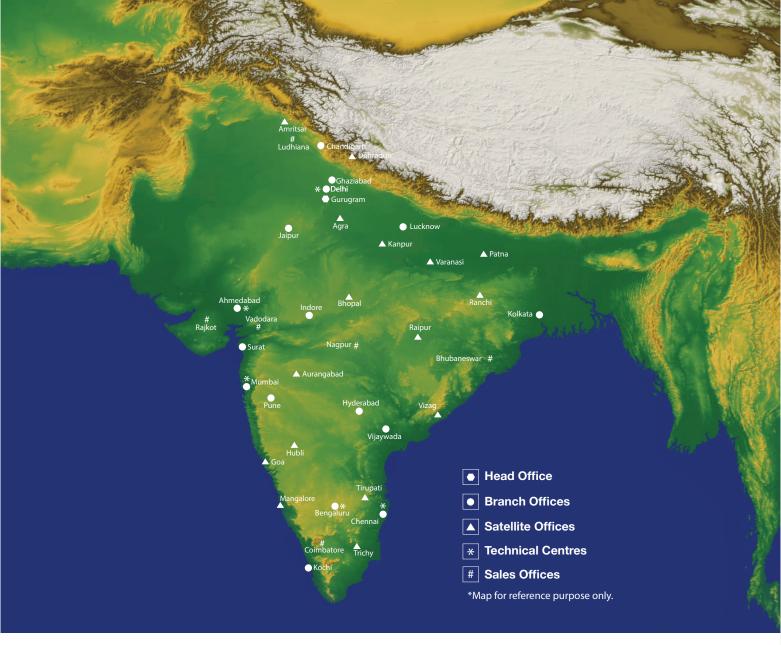

MITSUBISHI ELECTRIC INDIA PVT. LTD.

HEAD OFFICE: 3rd Floor, Tower A, Global Gateway, MG Road, Gurugram – 122002 (Haryana) **Tel. No.:** (Main): 0124-6739300/301 **Website:** www.MitsubishiElectric.in **Email:** customersupport@asia.meap.com

BRANCH/SALES OFFICES: Ahmedabad: 09898125272; Bhubaneswar: 09073949597; Bengaluru: 080-40201600; Coimbatore: 0422-4385606; Chandigarh: 0172-4601645; Chennai: 044-49232222; Delhi: 011-66057900; Ghaziabad: 011-66057900; Hyderabad: 040-43438888; Indore: 0731-4098991; Jaipur: 0141-4011109; Kolkata: 033-40858800/16-88; Kochi: 0484-4862093; Lucknow: 9336311110; Ludhiana: 0161-4061654; Mumbai: 09167113443; Nagpur: 09921442323; Pune: 09890614499; Rajkot: 09586605009; Surat: 0261-4003111; Vadodara: 09879100457; Vijaywada: 08498894567.

SATELLITE OFFICES: Agra: 09536900140; Amritsar: 09780021037; Aurangabad: 07387777132; Bhopal: 09907135346; Dehradun: 08800878763; Goa: 09167113443; Hubli: 08448398010; Kanpur: 09336311110; Mangalore: 08448398012; Patna: 09073949596; Raipur: 8817936264; Ranchi: 09073949598; Tirupati: 09319591931; Trichy: 92055 99022; Varanasi: 09336311110; Vizag: 09205987308.

Customer Care Toll Free No.: 1800 102 2626

TECHNICAL CENTRES: Ahmedabad: 079-67777874; **Bengaluru:** 080-40201600; **Chennai:** 044-49232222; **Delhi:** 011-66057900; **Mumbai:** 022-66116200



"For E-waste Collection & Disposal process: Customer can get complete details of company process on collection, disposal of e-waste product (i.e. 'Mitsubishi Electric' make Air Conditioner) and incentive / exchange scheme for returning of e-waste on Company website (www.MitsubishiElectric.in) or by calling on Toll free number 1800 102 2626.

